

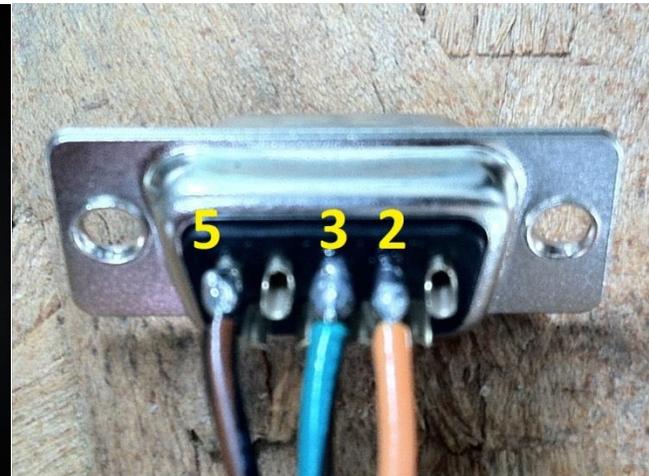
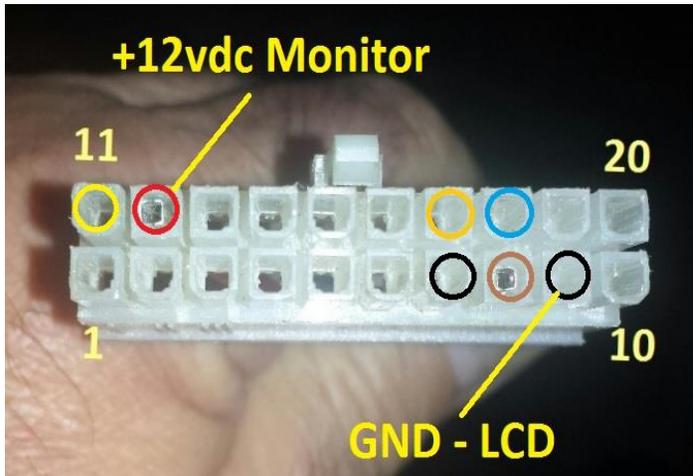


Tse BB2 harness J21 backplane plug

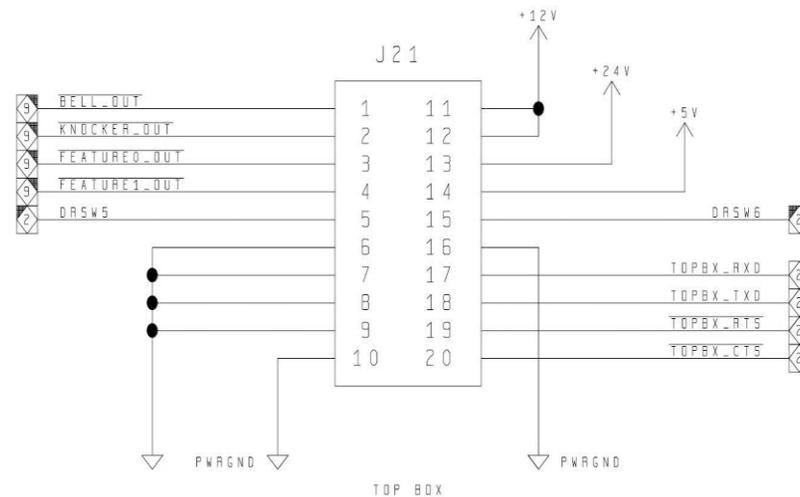

17 RXD, 18 TXD, 8 serial GND
11 +12dvc, 7-12dvc GND

DB9 pin#3 (TX)to #18 ATX
DB9 pin#2 (RX)to #17 ATX
DB9 pin#5 (GND)to #8 ATX

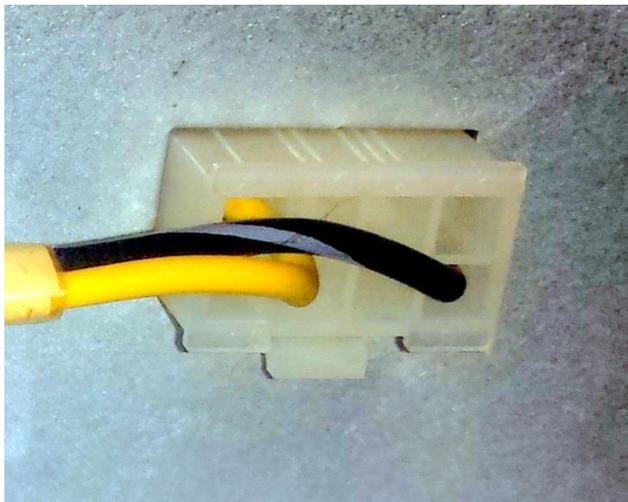

Power Plug Case.....

Pin 1 - +12vdc....Pin 11 ATX Pin 8 – GND.....Pin 7 ATX (OVER to Back of sheet)

TseTse cable pinout.

20 pin molex **9 pin DB9 serial** **8 Pin Molex Power (TseTse)** **Power (LCD)**

7	8
9	GND (BLK) 9
8	5
11	1
12	+12v (RED) 5
17	2
18	3

That is all you need to connect the Tse Tse. The other pins are topbox switch pins, which are not needed. You really only need the power (8 pin molex) and the 3 pins for the serial port.

